

Document No: ARMS-0000-H-PRO-N-0001 Rev 1

Project Name: Nolans Rare Earths





# **REVISION HISTORY**





# **TABLE OF CONTENTS**

1.0	INT	RODUCTION	5					
	1.1	Background	5					
	1.2	Purpose	5					
	1.3	Objectives	5					
	1.4	Planning and Equipment						
2.0	GRO	DUNDWATER SAMPLING PROCEDURE	7					
	2.1	7						
	2.2	Sampling Equipment						
	2.3	7						
		2.3.1 Groundwater Sample Assay Suite	13					
	2.4	Sampling Frequency	13					
		2.4.1 Environmental Incident Sampling	13					
3.0	GRO	DUNDWATER SAMPLING PROCEDURE	14					
	3.1	3.1 Standing Water Level Gauging						
	3.2	2 Groundwater Sampling Methodology						
	3.3	Sample Dispatch	15					
4.0	ABB	BREVIATIONS AND DEFINITIONS	17					
	4.1	Abbreviations	17					



AP	Ρ	Ε	Ν	D	IC	ES
----	---	---	---	---	----	----

APPENDIX A	Groundwater Gauging sheet (example)	
APPENDIX B	Groundwater Purging and Sampling Field Sheet Example	
APPENDIX C	Chain of custody Example	
INDEX OF F	IGURES	
Figure 2—1 Pot	ential Mine Site Groundwater Monitoring Bores1	1
Figure 2—2 Pot	ential Processing Site Groundwater Monitoring Bores1	2
INDEX OF T	ABLES	
Table 1—1 Sum	mary of Planning	6
Table 2—1 Preli	minary Groundwater Monitoring Locations – Stage 1	8



#### 1.0 INTRODUCTION

# 1.1 Background

The Nolans Rare Earths Project (the Project) is located approximately 135 km north north-west of Alice Springs, in the Northern Territory. The Project targets the Nolans Bore mineral deposit for rare earth elements. Activities will focus on construction, mining, processing, rehabilitation and decommissioning of an open-cut, rare earth mine, and its associated infrastructure.

# 1.2 Purpose

The Water Management Plan (WMP) for the Nolans Project (Project) provides a framework for the management of summary of sampling requirements at the site. The WMP has been designed to collect data throughout the construction and operations phase to assess the performance of water management onsite. In order to facilitate consistency in sampling, and comply with quality assurance and control methodologies, a series of sampling procedures have been established including:

- Surface Water Sampling Procedure;
- Mine Site Groundwater Sampling Procedure (this procedure); and
- Sediment Sampling Procedure.

All referenced company policies, standards, registers, operational procedures, activity specific documents, forms and templates are stored and can be accessed from within the Arafura Resources Integrated Management System (ARMS).

# 1.3 Objectives

The primary objective of Groundwater Sampling Procedure is to obtain a representative water sample with minimal alteration in water chemistry. The collected sample should represent the physical, chemical and biological characteristics of groundwater in the target unit as closely as possible.

The Groundwater Sampling Procedure locations will focus on the Mine Site and Processing Area, groundwater monitoring and assessment within the borefield is detailed in the WAMP.

#### 1.4 Planning and Equipment

A number of factors must be considered during the field planning phase, prior to groundwater sampling. These include consideration of access road conditions, safety requirements, the depth of groundwater and well/bore construction (internal diameter and gravel pack). A summary of equipment and associated potential suppliers are provided in Table 1—1. All equipment in relation to groundwater sampling should be ordered a minimum of four weeks prior to sampling.



Table 1—1 Summary of Planning

Timing	Details	Supplier
At least 4 weeks prior to sampling	Order	tbc
	Lab Bottles	
	Laboratory bottles	
	Eskies and Cool Bricks	
	Hire / Maintenance Check	Eco Environmental
	Low flow pump	6/509-511 South Rd, Ashford SA
	Water level gauge or interface probe	5031 08 8293 3355
		adelaide@ecoenvironmental.com.au
		Thermo Fisher Scientific
		5 Caribbean Dv, Scoresby Vic 3179
		03 9757 4377
		RentalsAU@thermofisher.com
	Purchase	Eco Environmental
	0.45µm Stericup filters	6/509-511 South Rd, Ashford SA
	Stericup vacuum pump	5031
	Low-flow tubing	08 8293 3355
	Nitrile gloves	adelaide@ecoenvironmental.com.au
	Decon N	
		Thermo Fisher Scientific
		5 Caribbean Dv, Scoresby Vic 3179
		03 9757 4377
		RentalsAU@thermofisher.com
1 day prior to sampling	Calibrate	
	Water quality meter	



#### 2.0 GROUNDWATER SAMPLING PROCEDURE

# 2.1 Groundwater Sampling Events

The monitoring of groundwater at the Project is split into two types as detailed below:

## **Standing Water Level Gauging**

Measurement of the standing water level relative to a surveyed point on the internal well casings. A groundwater gauging field sheet is provided in Appendix A.

# **Groundwater Sampling**

Measurement of the standing water level, purging, recording water quality data and sampling. A groundwater purging sheet and Chain of Custody (CoC) sheet is provided in Appendix B and Appendix C, respectively.

# 2.2 Sampling Equipment

Surface water sampling requires the following:

- Groundwater sampling requires the following:
- Groundwater Gauging Sheet (Appendix A), Groundwater Purging Sheet (Appendix B) and Chain of Custody sheet (Appendix C);
- Water level gauge or interface probe;
- Water quality meter (calibrated);
- Low-flow sampling pump/equipment;
- Disposable low-flow sampling tubes;
- 0.45 µm water filters and suction pump;
- Eskies and cool bricks;
- Laboratory bottles;
- Nitrile gloves;
- Decontaminated plastic or stainless-steel bucket;
- Padlock keys and tools to remove well caps; and
- Permanent marker.

# 2.3 Sampling Locations

The sampling events and frequencies at each groundwater well is provided in Table 2—1 and presented on Figure 2-1 and Figure 2-2. The groundwater well locations are provided in Table 2—1 are indicative and will be further defined throughout the LOM as various facilities are constructed and/or expanded. Baseline / operation results will be reviewed through the MMP process to determine if further focused localised groundwater monitoring and investigation is required.



# Table 2—1 Preliminary Groundwater Monitoring Locations – Stage 1

Note - Table to be revised in line with completed detailed designs. Locations and sample frequencies to be revised accordingly through LOM.

	Coor	dinates				Monitori	ing Schedule		
Site ID	Easting	Northing	Туре	Description	Ba	seline	Operation		
	Easting	Northing			SWL	Laboratory	SWL	Laboratory	
MB104 A / B			Boundary	mining) Northern boundary, adjacent to Sediment Control and Kerosene Camp Creek.  Logger			Automatic Logger		
MB107 A / B			Point Source / Boundary			Quarterly			
MB109 A / B			Point Source	ROM and western edge of East WRD.	Quarterly		Quarterly		
MB110 A / B			Point Source	ROM, West WRD and Southern Pit LOM extent. I Monthly I		Automatic Logger			
MB111 A / B			Point Source	Southern edge of LOM Pit and Kerosene Camp and Stage 1 and 2 diversions.	Monthly	Biannual Sampling	Automatic Logger	Quarterly	
MB112 A / B			Point Source	Western edge of Pit LOM, and southern edge of West WRD	Monthly		Automatic Logger		
MB113 A / B			Point Source	Western edge of West WRD and Topsoil Stockpiles.	Quarterly		Quarterly		
MB114 A / B			Point Source	Northern edge of West WRD.	Quarterly		Quarterly		
MB115 A / B			Point Source	Northern edge of LOM Pit, and upgradient / downgradient of Sediment control	Monthly		Automatic Logger		
MB116 A / B			Point Source	Northern edge of East WRD.	Quarterly		Automatic Logger		



Processing Site						
MB203 A/B	Point Source	~50 m North East / East RSF	Monthly		Quarterly	Quarterly
MB204 A/B	Point Source / Boundary	Eastern boundary of mining lease and south east of RSF	Automatic Logger		Automatic Logger	Quarterly
MB205 A/B	Point Source	~50 m South RSF	Quarterly		Automatic Logger	Quarterly
MB206 A/B	Point Source	~50 m South west RSF	Monthly		Automatic Logger	Quarterly
MB209 A/B	Boundary	Background bore ~800 m south of RSF, adjacent to Landfill.	Monthly		Quarterly	Biannually (quarterly once Landfill is in operation)
MB210 A/B	Boundary	Background bore, south western boundary of mining lease, adjacent to Landfill.	Monthly	Quarterly	Quarterly	Biannually (quarterly once Landfill is in operation)
MB211 A/B	Boundary	Background bore southern.	Monthly		Quarterly	Biannually
MB213 A/B	Point Source / Boundary	~ 150 m North west of processing plant	Monthly		Quarterly	Quarterly
MB214 A/B	Point Source / Boundary	~50 m North east of processing plant	Monthly		Quarterly	Quarterly
MB215 A/B  Point Source / Boundary		~ 100 m South east of processing plant, adjacent to mine access road.	Monthly		Quarterly	Quarterly
Notes						



- 1. A / B denotes that a shallow and deep bore is proposed to be installed at the location. Not all sites allocated A and B bores will require nested or adjacent deep and shallow bores. Hydrogeological conditions should be assessed during drilling to determine this. Likewise, site specific conditions may negate the need to drill all of the aforementioned bores and should be reassessed based on local hydrogeological conditions.
- 2. Coordinates should be used as a guide, installation locations should be chosen to provide easy of access and reduce the risk of damage due to mining activity interaction.
- 3. Automatic loggers have been selected for locations which are in close proximity to surface water features and or provide the first perimeter of bores surrounding the pit. Manual monitoring can be superseded by automatic logging if practicable, at a frequency of 1 reading / day.
- 4. If concentrations are noted at boundary bores, additional down gradient bores should be installed as appropriate.
- 5. During operational period, the monitoring schedule should be reviewed annually to focus on any potential trends of groundwater impacts.




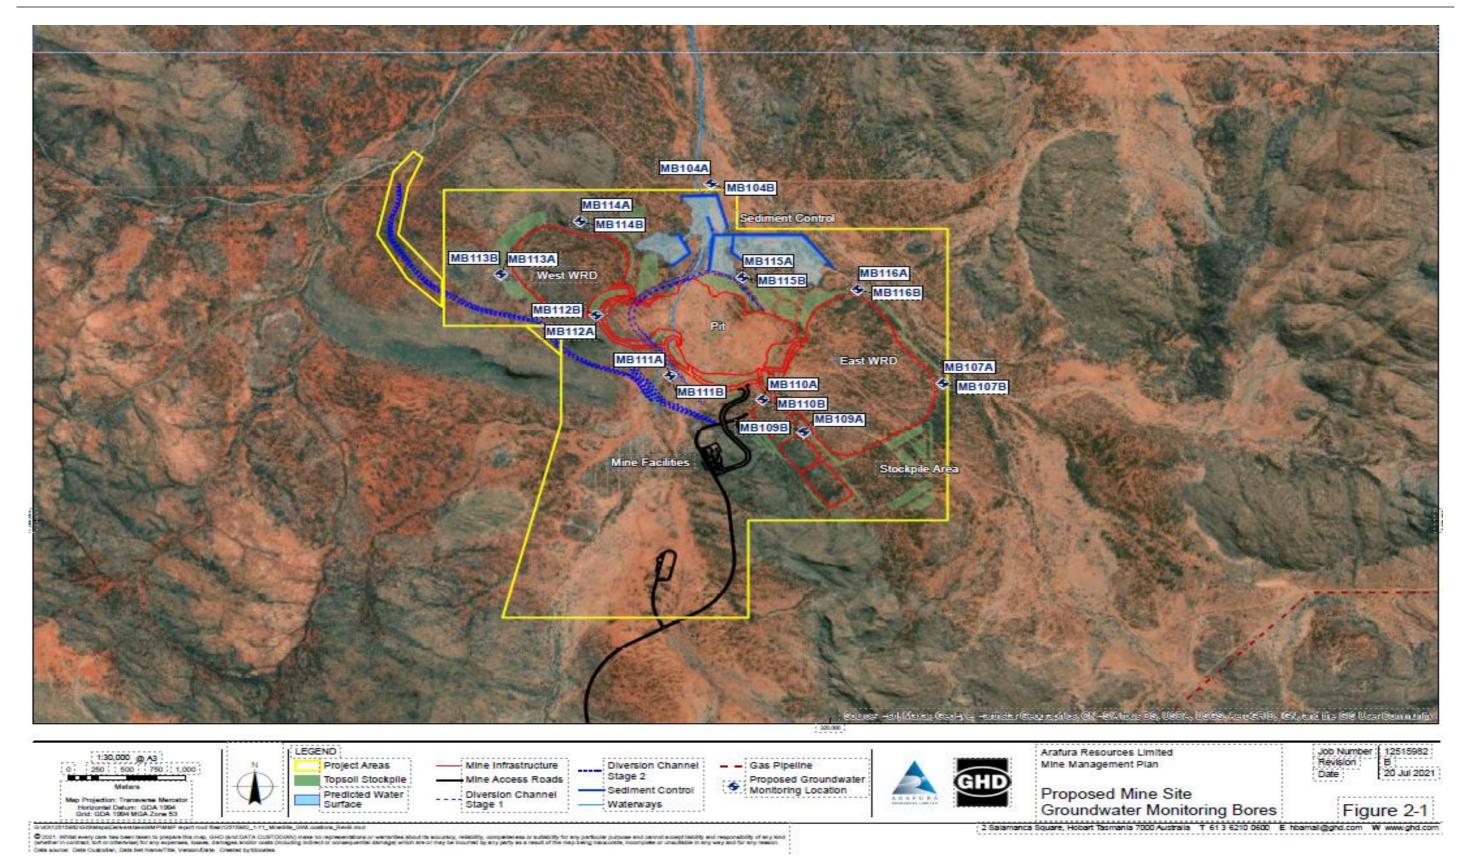


Figure 2-1 Potential Mine Site Groundwater Monitoring Bores





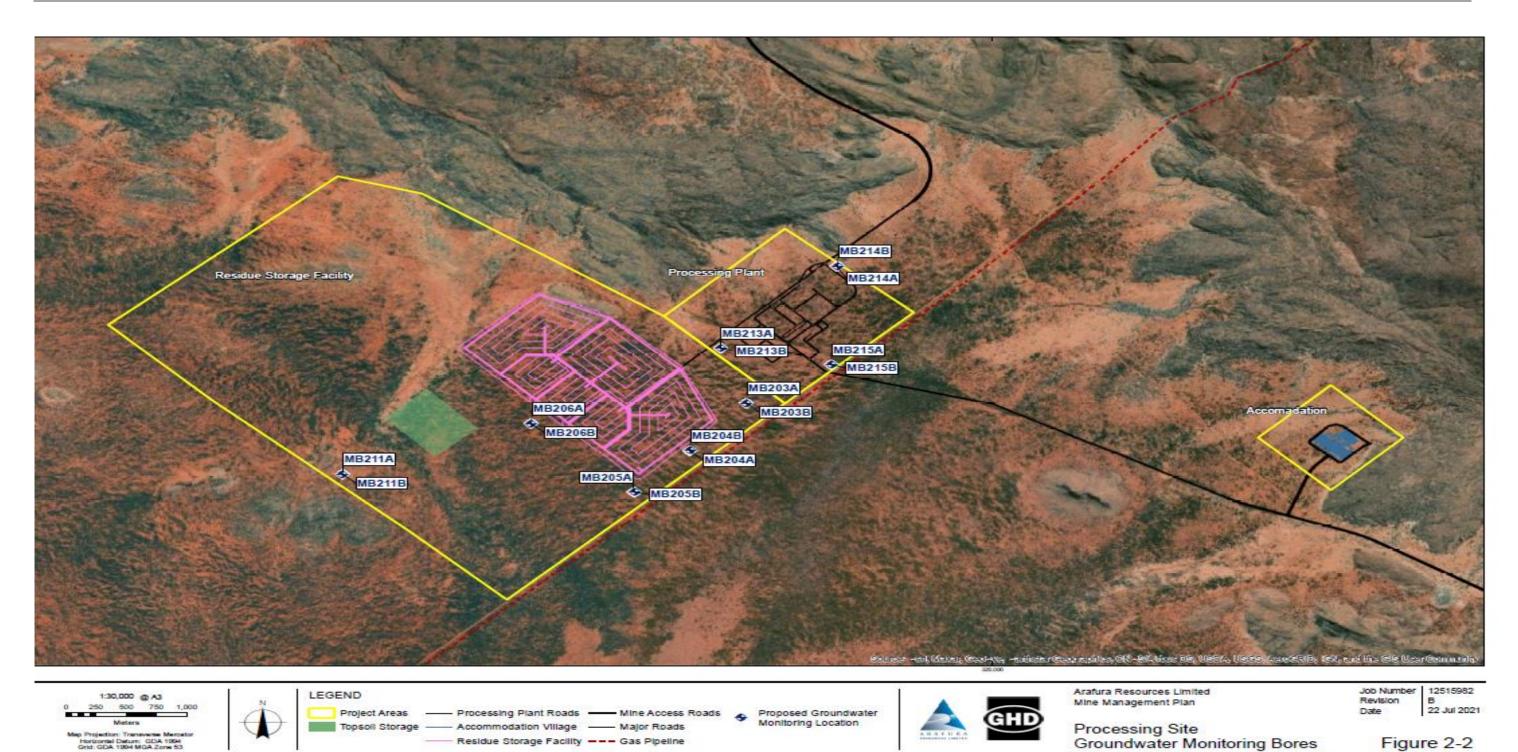

nanca Square, Hobart Tasmania 7000 Australia T 61 3 6210 0600 E hbamal@ghd.com W www.ghd.com

Figure 2-2 Potential Processing Site Groundwater Monitoring Bores



#### 2.3.1 Groundwater Sample Assay Suite

Field measurements are to be collected using the water quality meter during the purging process. Following stabilisation of water quality parameters (see Section 3.2), laboratory samples are to be collected. The groundwater sampling assay suite is provided below:

- Standing water level
- Laboratory analysis and Field Parameter Collection:
  - Total Dissolved Solids, Total Suspended Solids, Total Hardness and Total Acidity and Alkalinity
  - Major ions (CaCO<sub>3</sub>, CO<sub>3</sub>, HCO<sub>3</sub>, Ca, Mg, K, Na, Cl, SO<sub>4</sub>, NO<sub>3</sub>)
  - Metals total and dissolved (0.45 μm field filtered¹): Al, As, B, Ba, Cd, Co, Cu, Fe, Li, Pb, P,
     Mn, Hg, Mo, Ni, Rb, Se, Sr, Ag, U, Th and Zn
  - Radionuclides (U-238, U-234, Th-230, Ra-226, Rn-222, Pb-210, Po-210, Th-232, Ra-228, Th-228). Radionuclides will be tested annually at selected representative bores only.

Note – The operational analyte suite will be determined following review of baseline data.

# 2.4 Sampling Frequency

Sampling frequency will be determined following installation of bores. Some will be quarterly, and others may be six-monthly or at another frequency. Based on significant drilling data the occurrence of groundwater around the Nolans deposit is very limited. An indicative frequency is provided in Table 2—1.

# 2.4.1 Environmental Incident Sampling

In the event that an incident occurs where a hazardous substance or chemical is discharged to the environment the HSEC Manager will determine if an investigation is warranted based on severity level of the incident, the requirements of the Hazardous Substance Management Plan and Emergency Response Plan.

\_

<sup>&</sup>lt;sup>1</sup> Samples for dissolved metals are field filtered using 0.45 µm Stericup filter.



## 3.0 GROUNDWATER SAMPLING PROCEDURE

# 3.1 Standing Water Level Gauging

Groundwater gauging is to be undertaken in accordance with the following:

- Complete groundwater gauging sheet for each sample location; and
- Gauging
  - Gauge water level relative to Top of Casing (TOC) using an electronic interface meter or dip tape. The well cap should be removed and the well allowed to stabilise before measurements are made. Where possible, depth measurements should be recorded to the nearest 1mm (i.e.0.001 m).
  - A groundwater gauging sheet is provided in Appendix A.

# 3.2 Groundwater Sampling Methodology

Groundwater sampling is to be conducted in accordance with the following:

- Complete groundwater gauging sheet for location;
- Gauging
  - Gauge water level relative to Top of Casing (TOC) using an electronic interface meter or dip tape. The well cap should be removed and the well allowed to stabilise before measurements are made. Where possible, depth measurements should be recorded to the nearest 1mm (i.e.0.001 m);

#### Decontamination

 Reusable sampling equipment such as the pump and cables should be decontaminated prior to and at the completion of sampling each sample location. Decontamination can be undertaken by submerging the pump and cables in a mixture of Decon N / Decon 90 and water;

## Pump Installation

 Insert pump into well with care to avoid excessive disturbance and re-suspension of sediment within the well. The pump intake should be suspended inside the well screen so as to minimise the volume of stagnant groundwater required to be purged and intercept the inflowing groundwater from the target formation;

# Purging

- Commence purging of well, the aim of this process is to remove 'stagnant' groundwater from the well so that groundwater is representative of the surrounding unit. Water quality parameters should be recorded at regular intervals (i.e. every 2 to 5 minutes or every 2 to 5 litres) on the groundwater gauging sheet (Appendix A).
- Parameters are to stabilise prior to sampling, they are considered stabilised when three consecutive readings are within the following limits:
- 10% for Dissolved Oxygen;



- ± 3% Electrical Conductivity;
- 0.05 pH units for pH;
- ± 0.2 °C for Temperature; and
- ± 10 mV Redox.

#### **Contingency - No Parameter Stabilisation**

If after prolonged purging the parameters do not stabilise to within the specified limits, the original well and gravel pack volume should be calculated and ensure at least 3 well volumes of groundwater has been purged.

#### **Contingency – Pumped Dry**

Low yielding wells that are purged dry should be left to recover. Following recovery of groundwater levels in the well, sampling can proceed on the assumption that the groundwater represents inflow from the unit screened by the well. In this instance, measurement of stabilisation parameters should record a minimum of three consecutive readings prior to sampling.

- Groundwater Sampling
  - A groundwater sample should be collected after the measured parameters have stabilised. Commonly the purging device is used to sample the groundwater. Sampling should be undertaken so as to minimise the entry of air into the sample – run the outflow from the sampling device down the side of the container, rather than allowing it to cascade into the container.
  - Once collected, groundwater samples should be labelled and stored in ice chilled cooler boxes. Samples should be kept out of the sun. Samples should be returned to the laboratory under Chain of Custody (COC) documentation as detailed in Section 3.3.
  - A total metals sample (not filtered) and a dissolved metals sample should be collected.
     The dissolved metals sample requires field filtration through a disposable 0.45 µm filter;
- Waste Disposal
  - Purged groundwater is to be pumped onto the ground and all used disposable sampling equipment should be stored for disposal at the process site including filters, tubing and bladders.
- Electronic Transfer
  - All purging results, duplicate locations and CoC are to be scanned and kept on file. The final purging results prior to sampling are to be entered into the groundwater database.
     Purging sheets should be stored online for reference.

# 3.3 Sample Dispatch

Groundwater samples have potential to deteriorate following collection. Samples are to be placed into onsite fridge pending dispatch to laboratory. At completion of the sampling round bottles are to be packed into eskys and ice bricks placed on top of samples and transferred to Alice Springs



haulage depot. Samplers are to contact the haulage companies and laboratory to inform of sample delivery and requirements to keep refrigerated.

The sampler is to inform the laboratory of sample postage and provide a completed Chain of Custody (CoC). A blank CoC is provided in Appendix C.



#### **ABBREVIATIONS AND DEFINITIONS** 4.0

#### **Abbreviations** 4.1

Abbreviation	Meaning
Arafura / ARU	Arafura Resources Limited
μg	Microgram
μS	Microsiemens
AHD	Australia Height Datum
ALARA	As Low as Reasonably Achievable
ANZECC	Australian and New Zealand Environment and Conservation Council
BaP	Benzo[a]pyrene
BFD	Blind Field Duplicate
BOM	Bureau of Meteorology
BTEX	Benzene, Toluene, Ethylbenzene and Xylenes



# APPENDIX A GROUNDWATER GAUGING SHEET (EXAMPLE)

GROUNDWATER GAUGING FIELD SHEET															
Date				Samp	oler										
GROUNDWAT	ER LEVE	LS													
Standing water	Standing water level is measured from the top of internal casing (TOIC).														
Groundwater Well	Easting	Northing	Top of Intern Casing (m AF	al 9	Wat Lev		Standing Water Level (m AHD)	Comments (Water Flow, Color, Suspended Sediments)							
Additional Co	mments														



# APPENDIX B GROUNDWATER PURGING AND SAMPLING FIELD SHEET EXAMPLE

GROU	GROUNDWATER PURGING AND SAMPLING FIELD SHEET													
PROJEC	CT DETAILS													
Depth	ı to Wateı	r Tabl	e Before	Boreh	ole ID:									
Depth	to Botto	m of	Casing (r	Date										
Depth	ı to Water	r Tabl	e After S	ampling	(m TOC):			QA Co	ollected	:				
Samp	ler:							Samp	le Meth	od:				
FIELD	PARAM	ETER	S (Min	of five)										
Time	Volume (L)			olume D.O D.O L) (%) (mg				Turbidity (NTU)	E.C (us/cm)		Eh (mV)	Temp (°C)	Comments (water flow, color, suspended sediments)	
							<u> </u>							
							<u> </u>							
							<del> </del>	<u> </u>						
Post S	Sample P	aram	eters											
Numb	oer of Bot	tles			Comments:									



# APPENDIX C CHAIN OF CUSTODY EXAMPLE

CHAIN OF CUSTODY Ps. 00 8509 0500 Ex. CUSTODY Ps. 00 8509 0500 Ex. CUSTODY Ps. 00 3509 0500 Ex. CUSTOD Ps. 00 3509 0500 Ex. CUSTOD Ps. 00 3509 0500 Ex. CUSTOD Ps. 00 7471 9500 Ex. CUSTOD Ps. 00 7471		CHAIN OF CUSTODY CUSTODY ALS Laboratory: Pro. 08 1850 1850 E: - selected (Selected Acros Chair Cold ARS) Pro. 07 3050 1222 E: sereptub. Anishon (Selected Clust ARS) Pro. 07 3050 1222 E: sereptub. Anishon (Selected Clust ARS) Pro. 07 7411 9500 E: gludenon (Selected Clust ARS) Pro. 07 7411 9500 E: gludenon (Selected Clust ARS) Pro. 07 7411 9500 E: gludenon (Selected Clust ARS) Pro. 07 7411 9500 E: gludenon (Selected Clust ARS) Pro. 07 7411 9500 E: gludenon (Selected Clust ARS) Pro. 07 7411 9500 E: gludenon (Selected Clust ARS) Pro. 08 7411 9500 E: gludenon (Selec		Ph: 07 4944 017  IMELBOURNE Ph: 03 8549 960  IMUDGEE 27 5 Ph: 02 6372 673	DIADOCKY 78 Haditor Road Mackey OLD 4740 Ph. D7 4444 O17 E. making@alejdaholor Ph. D7 4444 O17 E. making@alejdaholor Ph. D7 4444 O17 E. making@alejdaholor DR C7 4444 O17 E. making@alejdaholor DR C					Pin 02 8784 6858 E. samples. Syderp@despilation. W 2541 Pin 07 4780 0000 E. tonesenik samples. Syderp@despilation. GOV 17 4780 0000 E. tonesenik samples. Syderp@despilation. GOV 17 4780 0000 E. tonesenik samples. Syderp. Syderp. GOV 17 4780 0000 E. tonesenik samples. Syderp. GOV 18 4780 E. Syderp.								
CLIENT: TURNAROUND REQUIREMENTS:  [Standard TAT may be longer for some tests						ard TAT (LIS						- 1	FOR LABORAT	ORY USE O	INLY (Circle)			
OFFICE:					ra Trace Organics)	☐ Non S	standard or u	rgent TAT ( <b>List du</b>	e date):					Custody Seal Intac		Yes	No N/A	
PROJECT				ALS G	QUOTE NO.:				coc	8EQUEN	CE NUMB	ER (Cirole)		Free ice / frozen ic receipt /	e bricks prese	w upon Yes	No N/A	
ORDER N	JMBER:								coc: 1	2	8 4	6 8	7	Random Sample T	emperature or	Receipt:	C	
PROJECT	MANAGER:		CONTACT P	H:		30			OF: 1	2	3 4	6 8	7	Other comment:				
SAMPLER			SAMPLER M	MOBILE:		RELINQUI	SHED BY:		RECEIVE	D BY:			RELIN	QUISHED BY:		RECEIVED I	BY:	
COC email	ed to ALS? (YES/NO	)	EDD FORMA	AT (or de	efault):													
Emall Rep	orts to (will default to Pf	M if no other address	es are listed):			DATE/TIME	E:		DATE/TIM	E:			DATE	/TIME:		DATE/TIME:		
Emall Invo	Ice to (will default to Pfv	I if no other addresse	s are listed):															
COMMENT	S/SPECIAL HANDLING	S/STORAGE OR DIS	PO SAL:			•										•		
AL\$ USE	A	SAMPLE DETA MATRIX: SOLID (S) V			CONTAINER INFO	ORMATION					al (unfilte			listed to attract su Dissolved (field fit		Additional Information		
LAB ID	SAMPL	E ID	DATE / TIME	MATRIX	TYPE & PRESERVATIVE to codes below)	(refer	TOTAL									Comments on likely of dilutions, or samples analysis etc.	ontaminant levels, requiring specific QC	
			-			100				- 1					10 2			
										_			1					
			-						-						-			
								0 20										
		1							_						8			
			ĺ															
		-								-								
				-	-					_			-					
TO STATE OF THE ST						TOTAL	***********											
V = VOA Via	HCI Preserved; VB = VOA	Vial Sodium Bisulphate	Preserved; VS = VOA Vial Su	ulturio Pre	d ORC; SH = Sodium Hydroxide/Cd Pr served; AV = Airfreight Unpreserved Vi for Acid Sulphate Solls; B = Unpreserv	al SG = Sulfurio									served Plastic	; F = Formaldehyde Pri	eserved Glass;	

Uncontrolled when printed